Induc-Stone


by ADVENTYS



REF : ADV1587

External structure	Stainless steel
Cooking surface	Stone, quartz, ceramic, concrete ...
Thickness of cooking surface	Between 4 and 20 mm
Control panel	Glass touches control with 2m power cord, plugs depend on the country. (custom power cord available until 3m)
Amp load	3 A
Functions	On/Off, manual setting (+/-) with 2 digits display and timer control. Levels : from 1 to 20.
Power supply	230 V ; 208/240 V ; AC 50 - 60 Hz
Weight (net)	8 kg / 17.6 lbs
Standards	Complies with European standards for safety of electrical appliances, for EMC, for Rohs and Intertek NSF & UL standards.
Details and options	Including a power cord, a spacer and a washable filter.


*Please ask ADVENTYS for different type of stone.

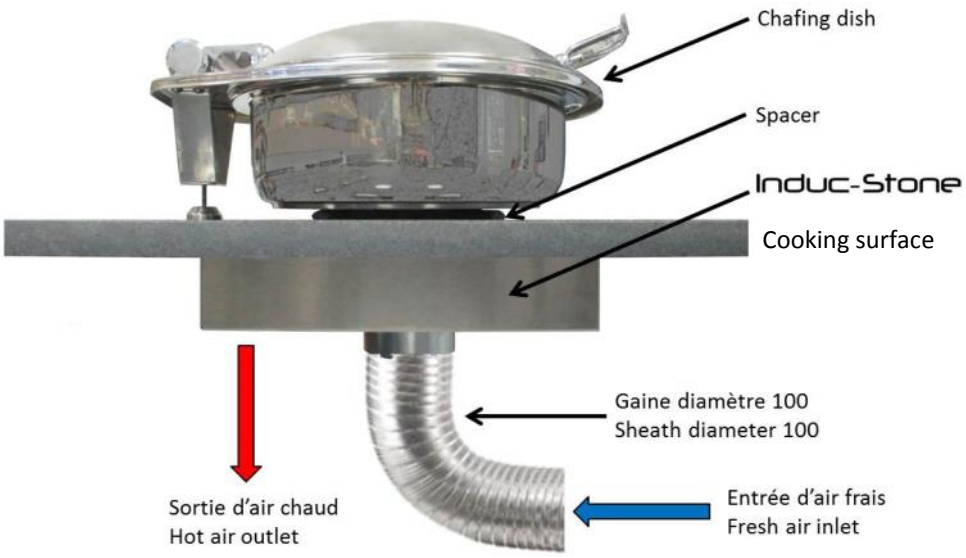

1: Use a material for the top of the work plan validated by ADVENTYS
Material thickness between 4 and 20 mm.
Identify the center of the home by a device of your choice.


2: Always position the spacer between the top and the " chafing dish "
You have to calibrate your product to obtain the temperature wished into your chafing dish.

3: Connect a tube to take in fresh air.

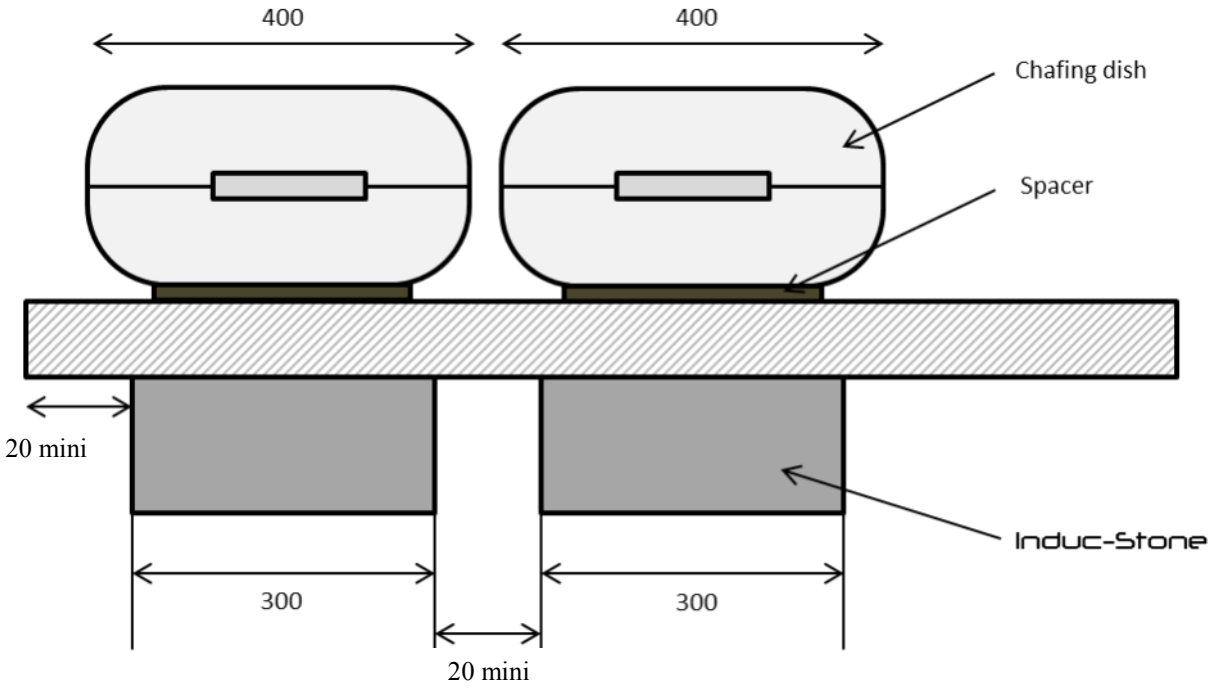



Spacer :

Large spacer for large chafing dish

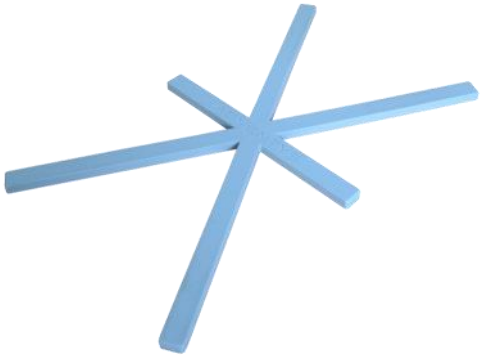


Small spacer for small chafing dish





Cut your large spacer in theses sections to get a small spacer.

Controls dimensions :

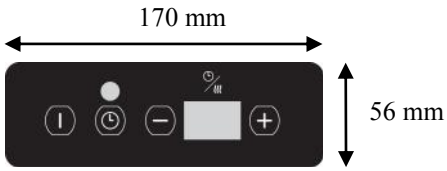

Options :




Chafing dish rond diam 40cm
Ref : ADV1641





Chafing dish GN2/3
Ref : ADV1642




Chafing dish GN1/1
Ref : ADV1643

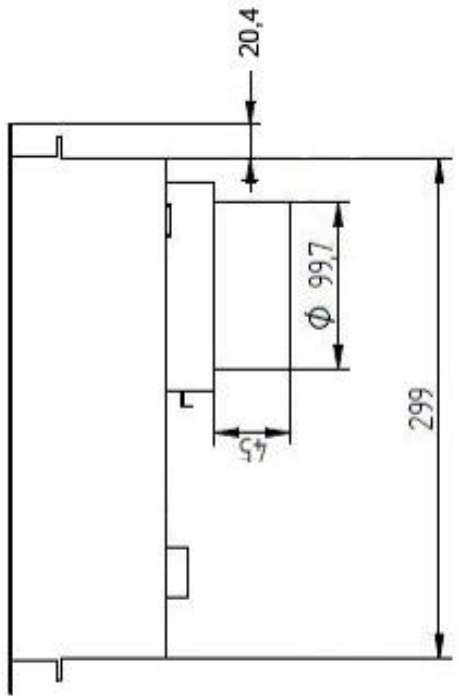
20,4
Φ 99,7
15
299

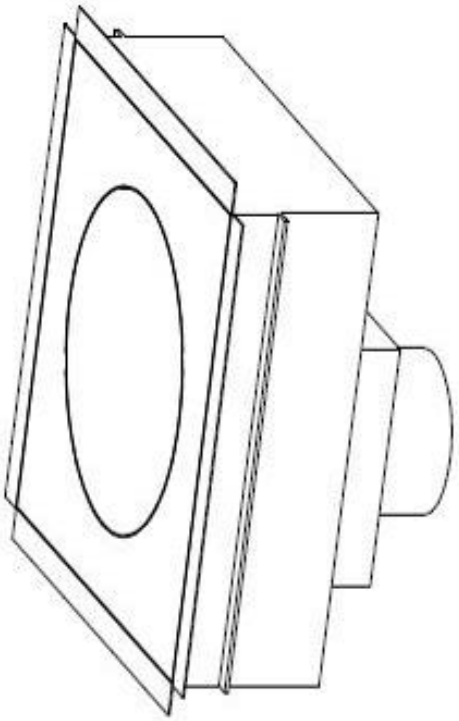

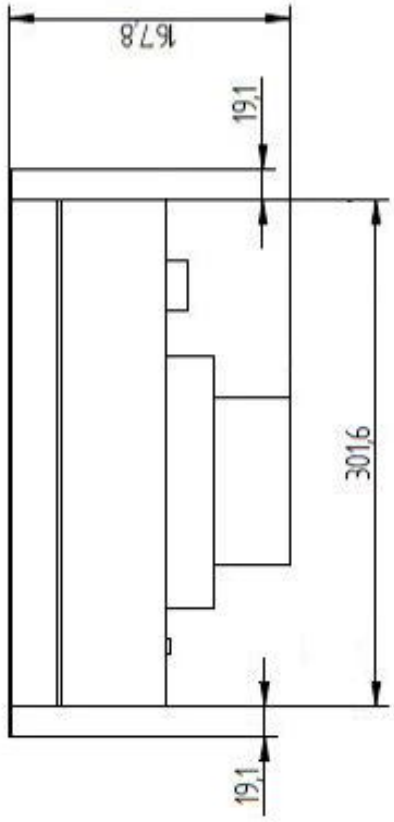
167,8
19,1
301,6
19,1

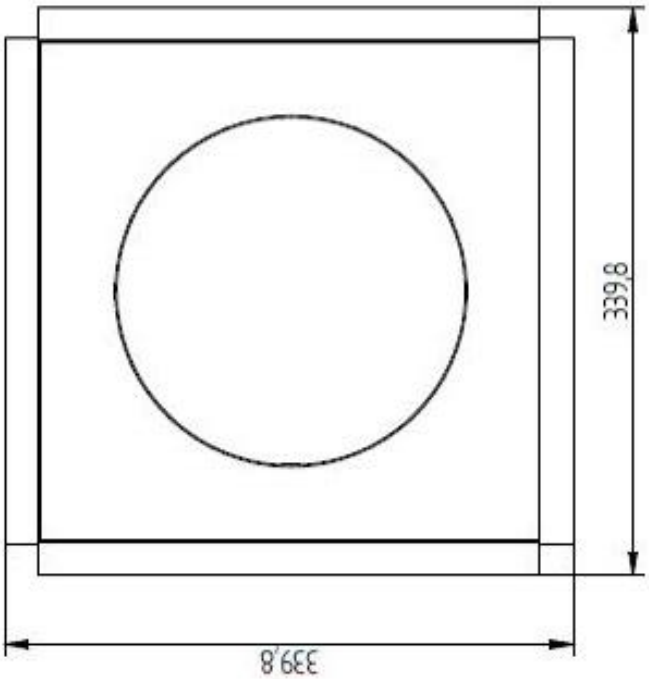
339,8
339,8