PENTAIR

EVERPURE®

EUROC 4 AUTOMATIC WATER SOFTENER


TECHNICAL DATA



Technical characteristics:

- Assembled with 100% Pentair components
- Includes Autotrol® 368 meter valve down flow
- Simple 3-step programming for time, hardness and salt settings
- 7-cycle high efficiency regeneration
- Inlet/Outlet connections: 3/4 inch – BSPT, male
- Drain line connection: 1/2 inch – BSPT, male
- Power requirements: 220 VAC/50 Hz & 60 Hz
- Water pressure range: 1.5 to 8 Bars
- Water temperature range: 2 to 38 C°
- Dow HCRS acid cationic strong resin

SOFTENER VOLUME CAPACITY CHART

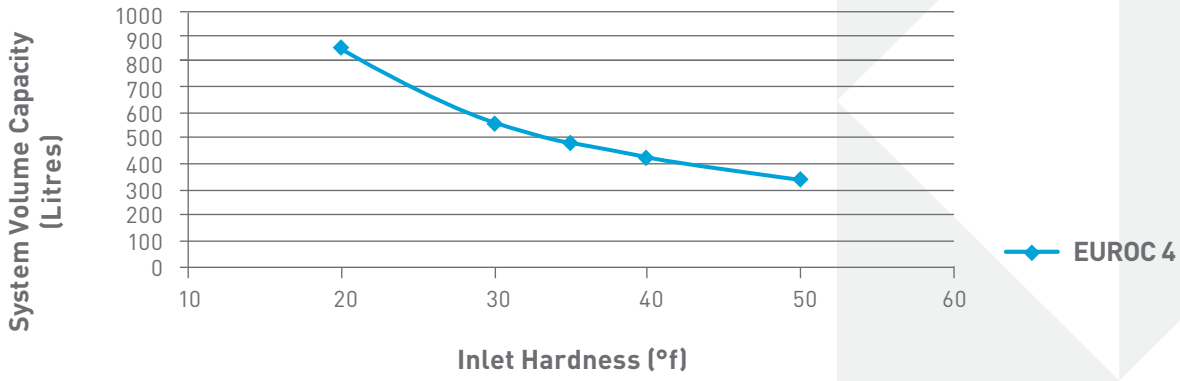

PENTAIR

EVERPURE®

TECHNICAL SPECIFICATIONS

Characteristics	EUROC 4
Part number	EUROC-4
Resin liters (l)	3.5
Nominal flow rate (m^3/h)*	0.14
Peak flow rate (m^3/h)*	0.21
Exchange capacity (°f/m^3)	21
Salt consumption per regeneration (kg)	0.42
Water consumption per regeneration (l)**	26
Salt storage (kg)	6
Width (cm)	17.8
Depth (cm)	35.7
Height (cm)	43.5
Approx. ship weight (kg)	5
Mains plug	2-pin Shuko

Note: All the calculations are based on salt dosage setting of 120g/liters.
*Indicatives data. Maximum flow rate to produce in order to respect the required service velocity for an optimal ion exchange, independently from the inlet pressure.
** Values may vary upon local condition and programming. All consumptions are given for an inlet pressure of 3.44 bar (50 Psi).