
specifications


RF8.CBR.1.2D

ReFlex Series, 2 Drawer, Chef Base Fridge

Project: _____

Item No: _____

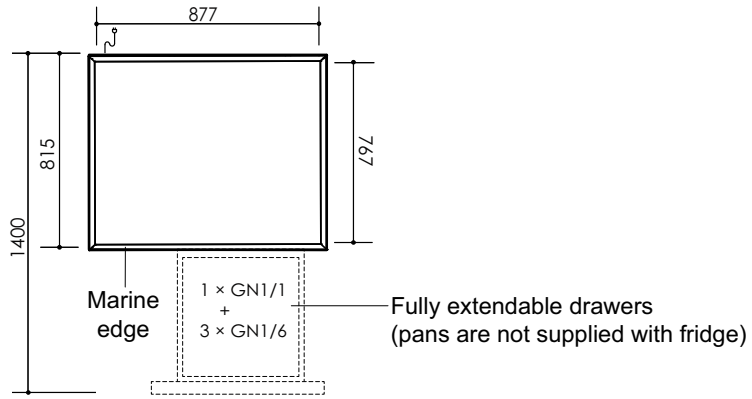

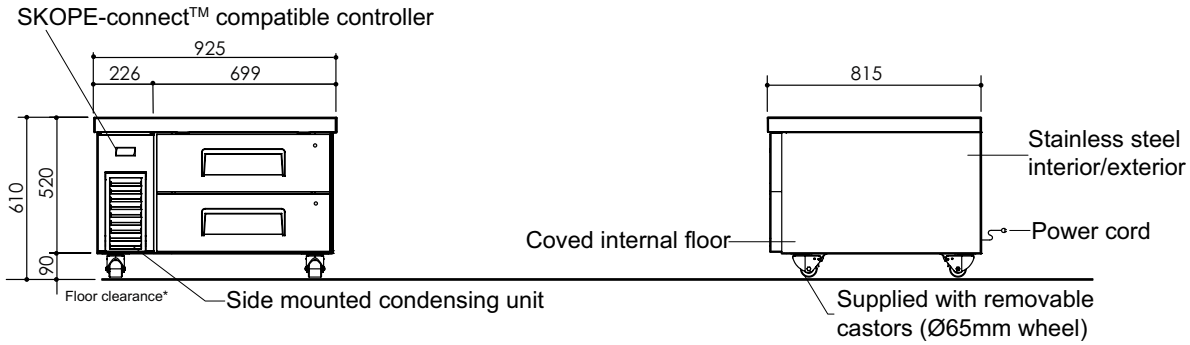

CABINET

Drawers	2 × fully extendible, refrigerated, stainless steel drawers with individual key locks. 1 bank of full drawers including stainless steel sheet base and sides. Each drawer fits 1 × GN1/1 and 3 × GN1/6, 100 mm deep pans (not supplied with the fridge).
Shelves	n.a.
Worktop	Total thickness 45 mm (0.7 mm 304 AISI stainless steel over heat shield and insulating cyclopentane foamed core)
Material	304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect 0°C to 10°C)
GEMS class	5M1
GEMS energy consumption	2.54 kWh/24 h
GEMS annual running cost	$278 p.a. (@ $0.30/kWh)

ELECTRICAL

Electrical safety climate class	5
Interior lighting	n.a.
Power cord	Supplied with a 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	1.6 amps

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	*Bluetooth*® wireless technology
Refrigeration system	Built-in, integral refrigeration system with side-mounted condensing unit
Refrigerant	R290/75 g (natural refrigerant)
Nominal capacity	650 watts
Heat rejection (Avg/peak)	105 watts/110 watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	600 mm*	379 mm
Width	925 mm	597 mm
Depth	815 mm	649 mm
Floor area	0.75 m^2	
Weight	93 kg	
Gross volume	147 L	
Net volume	43 L	

* With supplied castors fitted and excluding marine edge. See height variation below.

Height variation	
Supplied castors	610 mm
Supplied castors and excluding marine edge	600 mm
No castors	520 mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	**Overall cabinet dimensions**	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	**At each end wall**
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements	
Top	Not required
Sides	100mm for left side only
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserves the right to alter specifications without notice. Copyright © 2021

PSS0686 Rev. 1.5 Oct. 2022

SKOPE INDUSTRIES LIMITED
Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673
Email: skope@skope.com, Website: www.skope.com