
Refrigerated Sushi Displays




Temp: +2°/+4°C
Base and frames in AISI 304 mirror polished s/s
ultra-clear glass
sliding doors
Cold white LED lights
Cold tube plus cold serpentine
Electronic thermostat
Class 3 (25°C, 60% RH)

All glass



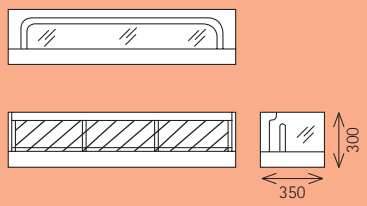

	Remote			With Group
SUSHIR/125		1250x350x300h	SUSHI/125	
SUSHIR/150		1500x350x300h	SUSHI/150	
SUSHIR/175		1750x350x300h	SUSHI/175	
SUSHIR/200		2000x350x300h	SUSHI/200	
SUSHIR/250		2500x350x300h	SUSHI/250	

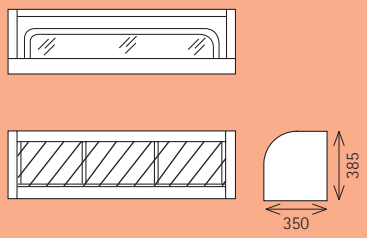

Temp: +2°/+4°C
Base and frames in AISI 304 mirror polished s/s
ultra-clear glass
sliding doors
Cold white LED lights
Cold tube plus cold serpentine
For remote refrigeration:
Electronic thermostat
Class 3 (25°C, 60% RH)

Curved glass



		Remote
SUSHIR/125C	1250x350x385h	
SUSHIR/150C	1500x350x385h	
SUSHIR/175C	1750x350x385h	
SUSHIR/200C	2000x350x385h	
SUSHIR/250C	2500x350x385h	

For all shipping information see pages 80/82